


IP Network Intercom Master Station IP-9000CA

Feature:

- ✓ Ideal solution for school classroom, hospital, hotel, military, factory, train station and airport.
- ✓ Mini compact master intercom station with LCD display.
- ✓ The IP network intercom master station built-in speaker, microphone.
- ✓ PPT and call two types full duplex two way communication system.
- ✓ The master intercom station IP-9000CA could direct call any intercom panel without permission, it also can start the intercom to others sub master panel or call station.
- ✓ It can start the communication to the call station by pressing the call button, the call station will be reminded with ring call and indicator as which intercom panel from where is calling. The call will be automatically transferred to next call station once busy, no answer or fault occurred.
- ✓ With one contact output and contact input for third party communication.
- ✓ With earphone monitor output by 3.5mm phone jack type.
- ✓ Non dedicated network is needed, the system could be easily built-up over exiting LAN/WAN network.
- ✓ Embedded server Linux technology with two ARM and DSP high speech chip.
- ✓ Max support 64,000 call stations working at the same time.
- ✓ Network data delay of less than 100 milliseconds.
- ✓ It is powered by DC12V, the power adapter is included.



System Connection Diagram:

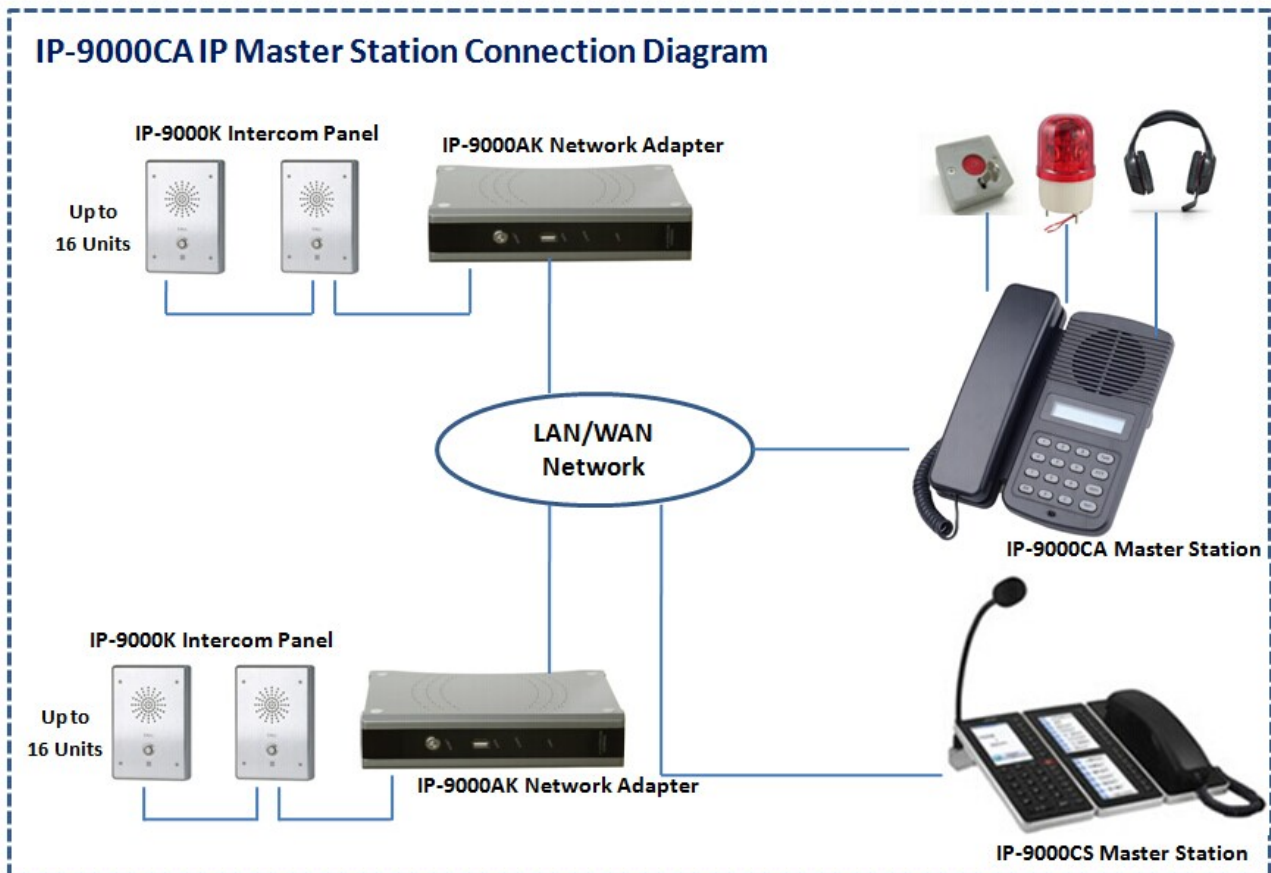

IP Network Intercom Master Station IP-9000CA

Specification:

Model	IP-9000CA
Description	IP Network Master Intercom Station
Power Supply	DC 12V
Power Consumption	5W
Network Protocol	TCP, UDP, ARP, ICMP, IGMP
Network Speed	10/100Mbps
Audio Sampling	8KHz-44.1KHz, 16 bits
Transmission Rate	8Kbps to 320Kbps
S/N Ratio	≥90dB
Frequency Response	20Hz-20KHz
Data Delay	100 milliseconds
Display	2" LCD in English
Connector	One Mic input, one line output & one RJ45 port for LAN, one contact input and one contact output
Dimensions	198(W)×105(D)×45(H)mm without the phone

Applications: Factory, Prison, Bank & Hospital

