

Conference System Controller CS-700




Features:

- ✓ The conference system controller is specially designed for discussion system.
- ✓ 19" rack mount type audio conference system.
- ✓ Cost-effective and excellent voice restoration system.
- ✓ Ideal use in board room, meeting room, conference room in hotel, office and government.
- ✓ The capacity of system is 70 units delegate microphone and expandable to 500 units.
- ✓ With one balanced XLR line output.
- ✓ With three 8 PIN ports for delegate unit.
- ✓ Direct power supply to the delegate unit.

Specifications:

Model	CS-700
Description	Conference System Controller
System Capacity	70 units delegate microphone
Connection Way	Bus way, each microphone unit connected to the main line
Power Supply	AC220V or 115V, 50-60Hz
Power Consumption	50W
THD	<0.05%
S/N Ratio	>75dB
Frequency Response	100Hz-18KHz
Input	Two line inputs.
Output	One line output by XLR type
Output Impedance	47KΩ
Communication Port	3 ports to connect with delegate units by 8 PIN connector
Dimension	480(W)×240(D)×44(H)mm
Weight	3.4kg

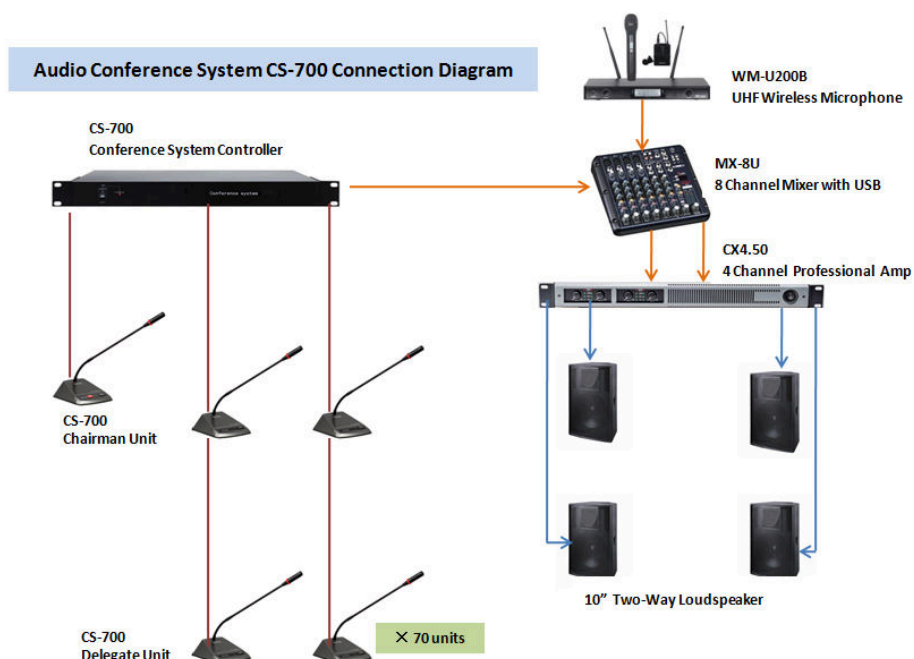

Cs-701, Conference System Chairman Unit CS-702, Conference System Delegate Unit



Features:

- ✓ The chairman unit is specially designed for discussion system.
- ✓ Cost-effective and excellent voice restoration system.
- ✓ Ideal for boardroom & conference room in hotel, office & government.
- ✓ System capacity is 70 unit microphones.
- ✓ Tabletop design microphone type for easy mobile installation.
- ✓ Chairman unit with priority over delegate unit when speech.
- ✓ Chairman unit with one red priority button except one microphone on button.
- ✓ Chairman unit can turn off the delegate unit speech.
- ✓ The system support only chairman speech mode without any interruption from others. Delegate units could speech only after the chairman unit exit the "Chairman Mode".
- ✓ With round ring indicator will be light on when microphone on.
- ✓ Gooseneck length of 390mm, other length could be customized without addition cost.
- ✓ Gooseneck color of black, silver could be optional.
- ✓ Voting, simultaneous interpretation and auto video tracking function are optional functions.

Specifications:

Model	CS-701	CS-702
Description	Chairman Unit	Delegate Unit
System Capacity	70 units microphone	
Connection Way	Bus way, each microphone unit connected to the main line	
Power Supply	DC24V by controller	
Voice Pickup Distance	15-50cm	
Sensitivity	-40dB±2dB	
Frequency Response	40Hz-16KHz	
Indicator	Red round ring indicator light on when microphone on	
Button	One microphone on in black and one priority in red	
Gooseneck Length	390mm	
Finish	ABS in black	
Cable	1.5 meters cable with T-shaped plug are included	
Dimension	153(W)×135(D)×58(H)mm	
Weight	0.5kg	