


CS-600

Digital Conference System Master Controller



Features:

- ✓ The conference system controller is specially designed for discussion system.
- ✓ Cost-effective and excellent voice restoration system.
- ✓ Ideal use in board room, meeting room, conference room in hotel, office and government.
- ✓ The capacity of system is 60 units and max 250 units by cascaded more extension controller.
- ✓ Voting, simultaneous interpretation and auto video tracking function are optional functions.
- ✓ Support multiple discussion modes: free, first in first out, and limited discussion.
- ✓ Support free discussion quantity of 1, 2, 3 and 5.
- ✓ Built-in stereo power amplifier rated output is 2× 50W.
- ✓ Amplifier with overload, high temp and short-circuit protection.
- ✓ Built-in 1W monitor speaker to monitor the system performance.
- ✓ With AUX input and MIC input.
- ✓ With one aux output, one line output and TEL input for telephone conference system.
- ✓ With REC output for recording system like DVR or recorder.
- ✓ With Effector input and output for EQ, mixer and DSP.
- ✓ With one RS232 communication port for central control system.
- ✓ AUX and AUX output for extra sound amplification equipments.
- ✓ Bass, treble, MIC, AUX, Monitor and Master volume control.
- ✓ Included with one 13 meters cable with 8 PIN plug.

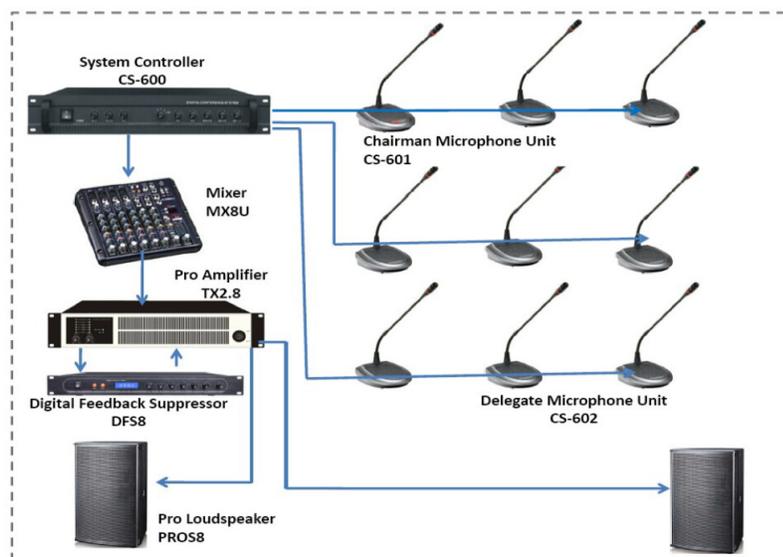

Specification:

Model	CS-600
Description	Conference System Controller
System Capacity	60 units and 250 units by cascaded more extension controller
Connection Way	Bus way, each microphone unit connected to the main line
Power Supply	AC220V or 115V, 50-60Hz
Power Consumption	500W
THD	<0.05%
S/N Ratio	>75dB
Frequency Response	100Hz-18KHz
Input	One aux, one mic, one effector, one RJ45 port for telephone input or video controller and one RS232 port for central control system
Output	One aux, one REC and one balanced XLR mixed line output, two pairs low impedance speaker outputs
Output Impedance	47K Ω
Communication Port	4 DIN ports to connect with delegate units by 8 PIN connector
Dimension	488(W) \times 360(D) \times 84(H)mm
Weight	12.7kg

Applications:

Meeting room, board room, conventional center, hotel conference room, religious gathering, economy or political summit etc.

