


# IP Network Outdoor Intercom Slave Station IP-9000A



## Feature:

- ✓ Ideal solution for outdoor or indoor two way communication system in noisy, dusty, high temp and acid or alkaline environment.
- ✓ IP network intercom system very suitable for big scale installation system whether by CAT5 cable or fiber optical cable.
- ✓ Aluminum finish with damage proof screw fixing up.
- ✓ Aluminum finish with damage proof screw fixing up.
- ✓ Both surface or embedded mounting ways with supplied mounting box.
- ✓ Classic range high quality IP intercom panel.
- ✓ Intercom panel built-in speaker and microphone.
- ✓ Full duplex two way communication system.
- ✓ It can start the communication to the call station by pressing the call button, the call station will be reminded with ring call and indicator as which intercom panel from where is calling. The call will be automatically transferred to next call station once busy, no answer or fault occurred.
- ✓ With one contact output and contact input for third party communication.
- ✓ Non dedicated network is needed, the system could be easily built-up over exiting LAN/WAN network.
- ✓ Embedded server Lynux technology with two ARM and DSP high speed chip.
- ✓ Max support 64,000 call stations working at the same time.
- ✓ Start time less than 0.1 second, and network data delay of less than 100 milliseconds.
- ✓ Waterproof rate of IP66.
- ✓ It is powered by DC12V, the power adapter is included.

## System Connection Diagram:

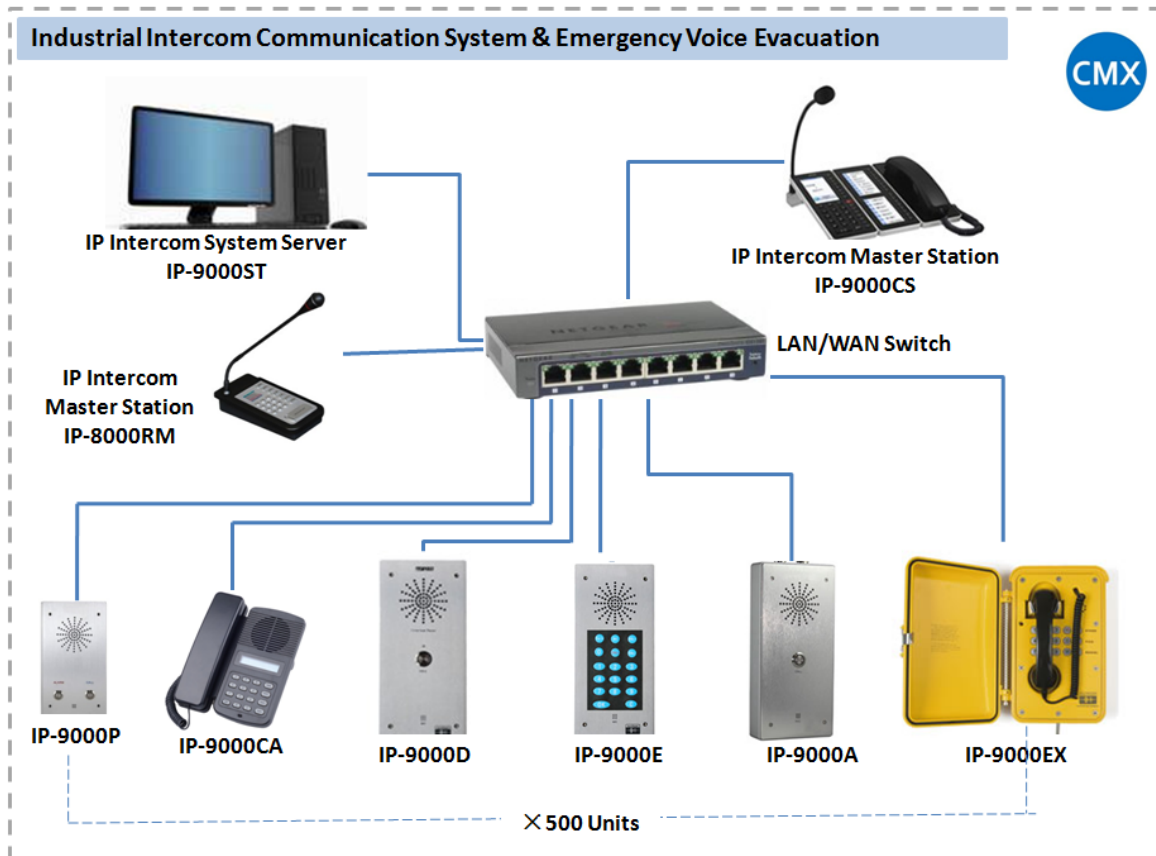

# IP Network Outdoor Intercom Slave Station IP-9000A

## Specification:

<b>Model</b>	<b>IP-9000A</b>
<b>Description</b>	IP Network Weatherproof Intercom Panel
<b>Mounting</b>	Support both surface or embedded by supplied mounting box
<b>Power Supply</b>	DC 12V
<b>Power Consumption</b>	5W
<b>Network Protocol</b>	TCP, UDP, ARP, ICMP, IGMP
<b>Network Speed</b>	10/100Mbps
<b>Audio Sampling</b>	8KHz-44.1KHz, 16 bits
<b>Transmission Rate</b>	8Kbps to 320Kbps
<b>S/N Ratio</b>	≥90dB
<b>Frequency Response</b>	20Hz-20KHz
<b>Data Delay</b>	100 milliseconds
<b>Waterproof Rate</b>	IP66
<b>Connector</b>	One line output & one RJ45 port for LAN, one contact input and one contact output
<b>Dimensions</b>	255(W)×115(D)×50(H)mm

## Applications: Refuge, Nursing Home, Prison, Bank & Hospital

