



ZATI Telephone Interface Unit

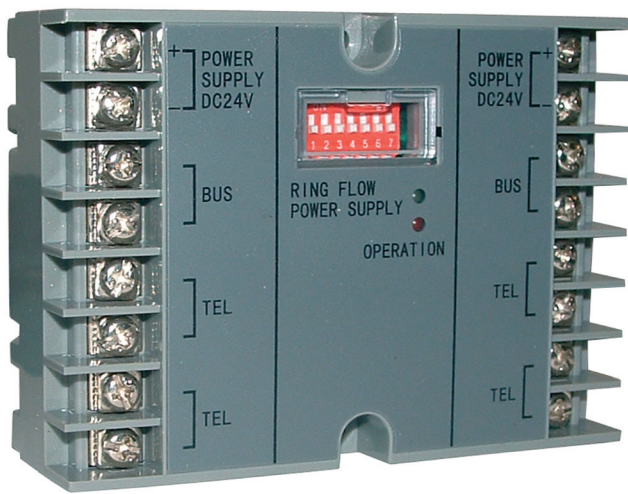

The ZATIU telephone interface unit is an addressable unit can be connected directly to the bus and it will provide a wide range of options.

Up to four ZTT or ZTS's can be connected to each ZATIU where required (typically in long corridors where all units can have one address).

The ZATIU when placed far from the control panel (more than 50m) must have the auxiliary 24Vdc (provided in the panel) in order to make sure that the ring tone level is not jeopardized.

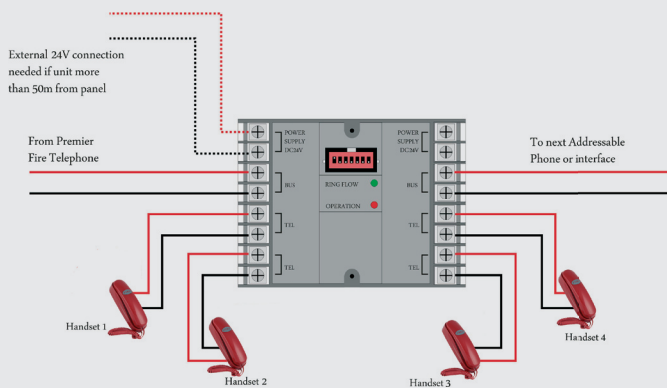

MODEL	ZATIU
PART NO	195-030
VOLTAGE	13-28Vdc
LINE SIGNAL SENDING	0 - 5dB
LINE SIGNAL RECEIVING	0 - 15dB
STANDBY CURRENT	≤18mA
RATED CURRENT	≤180mA (ringing), ≤50mA talking
FREQUENCY	300 - 3400Hz ±3dB